



# DSK22 THRU DSK220

Reverse Voltage - 20 to 200 Volts   Forward Current - 2.0 Ampere


## SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

### Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Metal silicon junction,majority carrier conduction
- ◆ Low power loss,high efficiency
- ◆ Built-in strain relief,ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:  
250 °C/10 seconds at terminals

### SOD-123FL

ROHS  
COMPLIANT

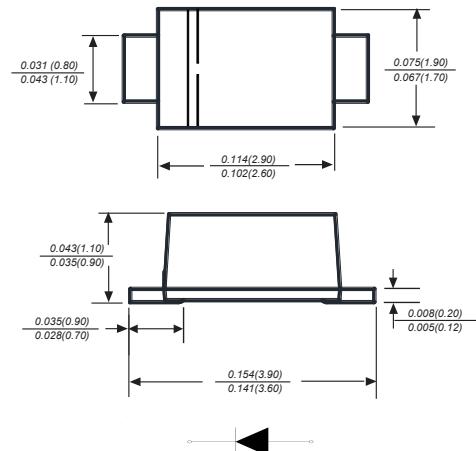

Dimensions in inches and (millimeters)

### Mechanical Data

Case\*: JEDEC SOD-123FL molded plastic body  
Terminals\*: Solderable per MIL-STD-750, Method 2026  
Polarity: Color band denotes cathode end Mounting Position: Any  
Weight : 0.00048ounce, 0.015 grams

### Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz,resistive or inductive load,for capacitive load current derate by 20%.

Parameter	SYMBOLS	DSK22	DSK24	DSK25	DSK26	DSK28	DSK210	DSK215	DSK220	UNITS				
Marking Code		K22	K24	K25	K26	K28	K210	K215	K220					
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	40	50	60	80	100	150	200	V				
Maximum RMS voltage	V <sub>RMS</sub>	14	28	35	42	56	70	105	140	V				
Maximum DC blocking voltage	V <sub>DC</sub>	20	40	50	60	80	100	150	200	V				
Maximum average forward rectified current at TL(see fig.1)	I <sub>(AV)</sub>	2.0							A					
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	50							A					
Maximum instantaneous forward voltage at 2.0A	V <sub>F</sub>	0.55		0.70		0.85		0.95		V				
Maximum DC reverse current T <sub>A</sub> =25°C at rated DC blocking voltage T <sub>A</sub> =125°C	I <sub>R</sub>	0.5		0.3		5.0		3.0		mA				
Typical junction capacitance (NOTE 1)	C <sub>J</sub>	220		80						pF				
Typical thermal resistance (NOTE 2)	R <sub>θJA</sub>	85.0							°C/W					
Operating junction temperature range	T <sub>J</sub>	-55 to +150							°C					
Storage temperature range	T <sub>STG</sub>	-55 to +150							°C					

Note:1.Measured at 1MHz and applied reverse voltage of 4.0V D.C.



# DSK22 THRU DSK220

Reverse Voltage - 20 to 200 Volts   Forward Current - 2.0 Ampere

## Typical Characteristics

Fig.1 Forward Current Derating Curve

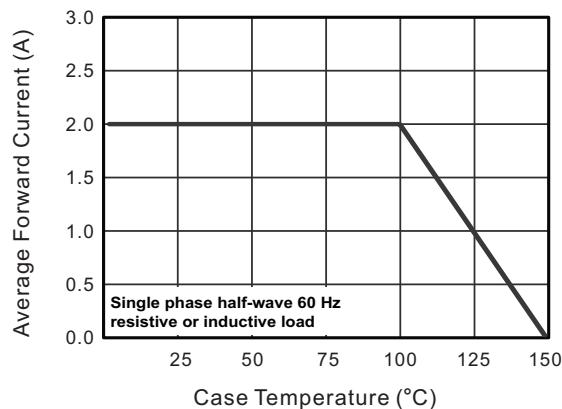


Fig.2 Typical Reverse Characteristics

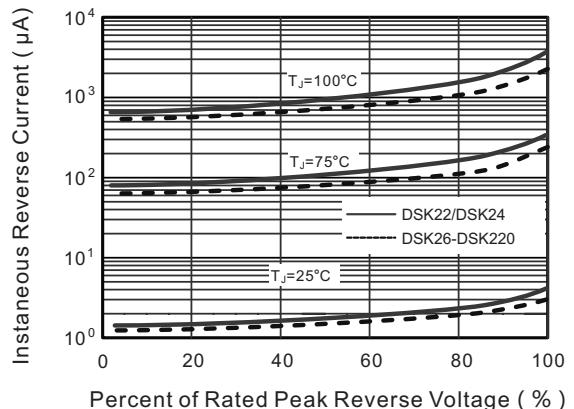


Fig.3 Typical Forward Characteristic

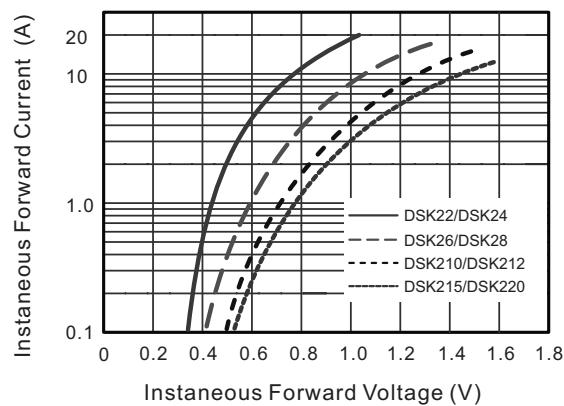


Fig.4 Typical Junction Capacitance

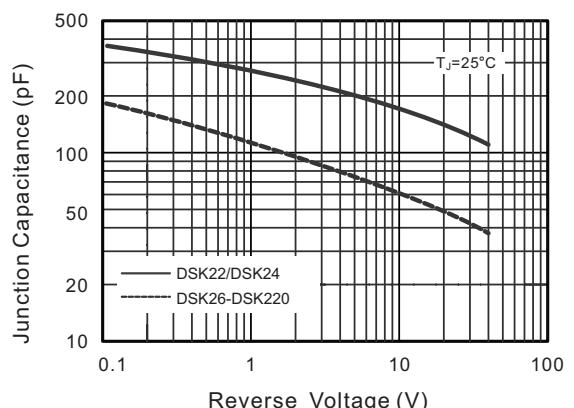


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


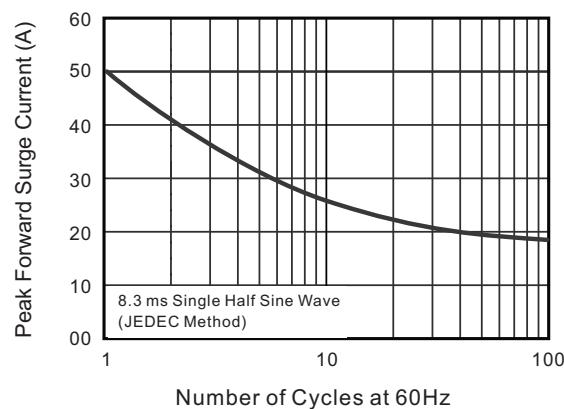


Fig.6- Typical Transient Thermal Impedance




The curve above is for reference only.

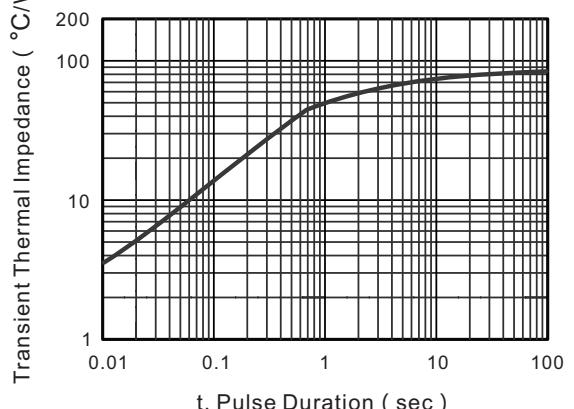

# DSK22 THRU DSK220

Reverse Voltage - 20 to 200 Volts   Forward Current - 2.0 Ampere

## Packing information

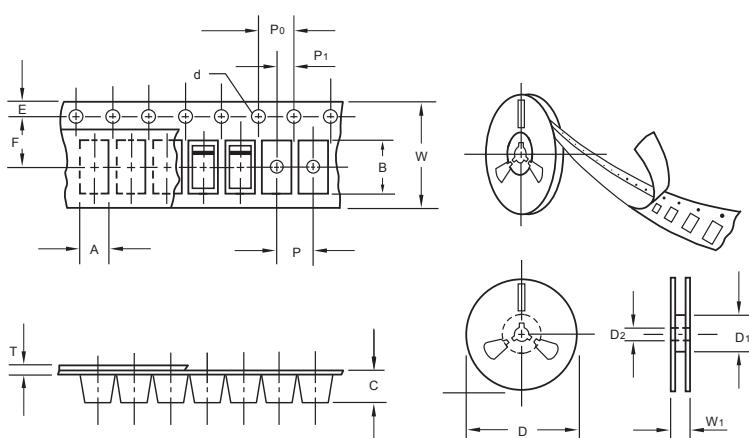


Item	Symbol	Tolerance	unit:mm
Carrier width	A	0.1	2.1
Carrier length	B	0.1	4.0
Carrier depth	C	0.1	1.60
Sprocket hole	d	0.05	1.55
7" Reel outside diameter	D	2.0	178.00
7" Reel inner diameter	D1	min	50.0
Feed hole diameter	D2	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	3.50
Punch hole pitch	P	0.1	4.00
Sprocket hole pitch	P0	0.1	4.00
Embossment center	P1	0.1	2.00
Overall tape thickness	T	0.1	0.25
Tape width	W	0.3	8.15
Reel width	W1	1.0	10.5

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.

## Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SOD-123FL	7"	3,000	4.0	45,000	210*208*203	178	430*430*235	180,000	9.0

## Suggested Pad Layout

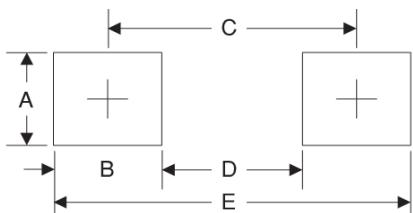

Symbol	Unit (mm)	Unit (inch)
A	1.2	0.047
B	1.2	0.047
C	3.2	0.126
D	2	0.079
E	4.4	0.173