



# MBR1620CT THRU MBR16100CT

Reverse Voltage - 20 to 100 Volts Forward Current - 16.0 Ampere

## SCHOTTKY BARRIER RECTIFIER

### Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Construction utilizes void-free molded plastic technique
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C, 0.25"(6.35mm) from case for 10 seconds

### Mechanical Data


**Case :** JEDEC TO-220AB Molded plastic body

**Terminals :** Solder plated, solderable per MIL-STD-750, Method 2026

**Polarity :** Polarity symbol marking on body

**Mounting Position :** Any

**Weight :** 0.060 ounce, 1.67 grams

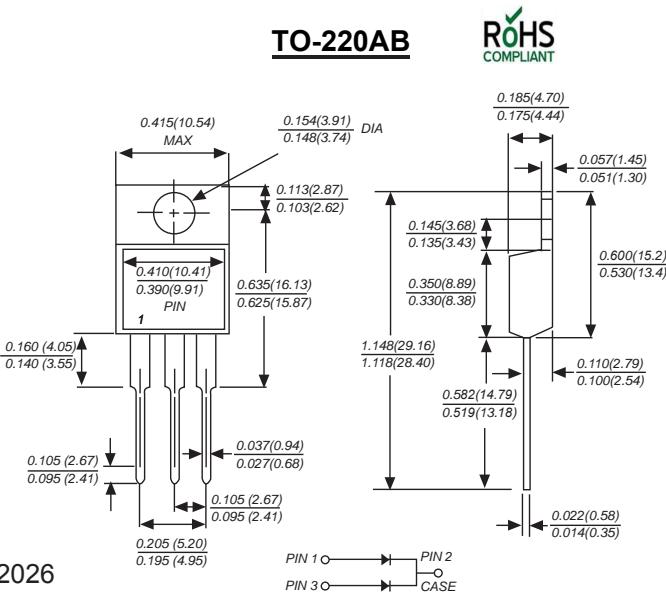

Dimensions in inches and (millimeters)

### Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	MDD MBR 1620CT	MDD MBR 1630CT	MDD MBR 1640CT	MDD MBR 1645CT	MDD MBR 1650CT	MDD MBR 1660CT	MDD MBR 1670CT	MDD MBR 1680CT	MDD MBR 1690CT	MDD MBR 16100CT	UNITS		
Marking Code														
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	45	50	60	70	80	90	100	V		
Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	32	35	42	49	56	63	70	V		
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	45	50	60	70	80	90	100	V		
Maximum average forward rectified current (see fig.1)	I <sub>(AV)</sub>	16.0										A		
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	150										A		
Maximum instantaneous forward voltage at 8.0A	V <sub>F</sub>	0.55		0.75		0.85								
Maximum DC reverse current TA=25°C at rated DC blocking voltage TA=100°C	I <sub>R</sub>	1.0										mA		
Typical junction capacitance (NOTE 1)	C <sub>J</sub>	500		360								pF		
Typical thermal resistance (NOTE 2)	R <sub>θJC</sub>	2.0										°C/W		
Operating junction temperature range	T <sub>J</sub>	-55 to +125				-55 to +150								
storage temperature range	T <sub>STG</sub>	-50 to +150										°C		

**Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal resistance from junction to case.



# MBR1620CT THRU MBR16100CT

Reverse Voltage - 20 to 100 Volts Forward Current - 16.0 Ampere

## Ratings And Characteristic Curves

AVERAGE FORWARD RECTIFIED CURRENT,  
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

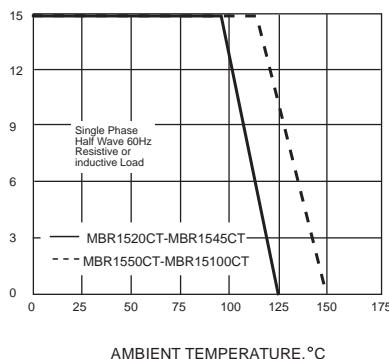


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

PEAK FORWARD SURGE CURRENT,  
AMPERES

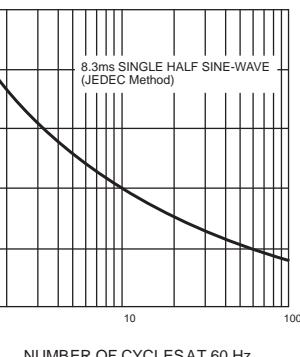


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

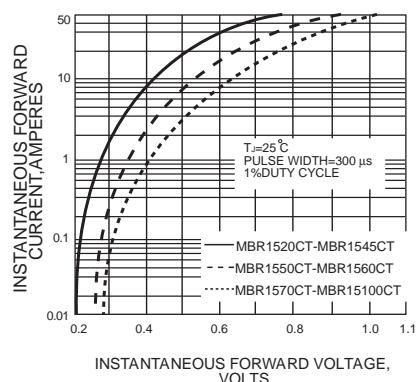


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

INSTANTANEOUS REVERSE CURRENT,  
MILLIAMPERES

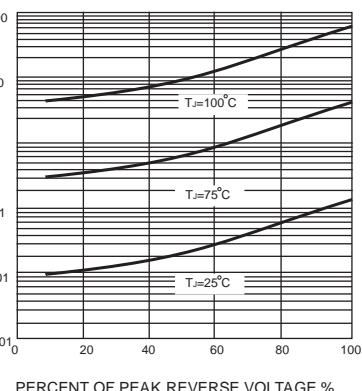


FIG. 5-TYPICAL JUNCTION CAPACITANCE


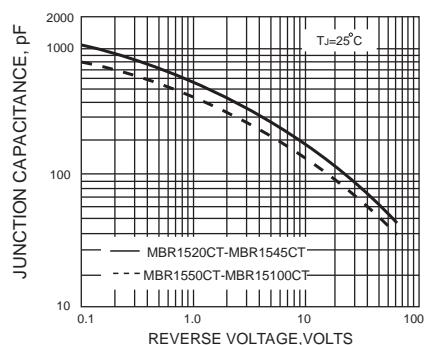


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

TRANSIENT THERMAL IMPEDANCE,  
 $\frac{^{\circ}C}{W}$

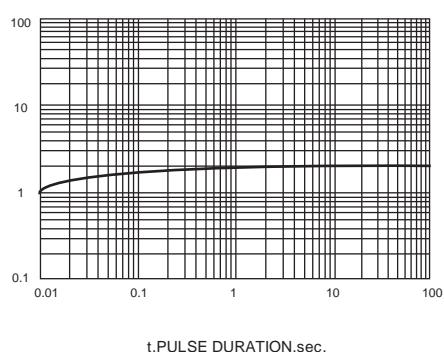

The curve above is for reference only.