



SF2010CT THRU SF2060CT

Reverse Voltage - 100 to 600 Volts Forward Current - 20.0 Ampere

ULTRAFAST RECOVERY RECTIFIER

Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Construction utilizes void-free molded plastic technique
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C, 0.25"(6.35mm) from case for 10 seconds

Mechanical Data


Case : JEDEC TO-220AB Molded plastic body

Terminals : Solder plated, solderable per MIL-STD-750, Method

2026 Polarity : As marked

Mounting Position : Any

Weight : 0.080 ounce, 2.24 grams

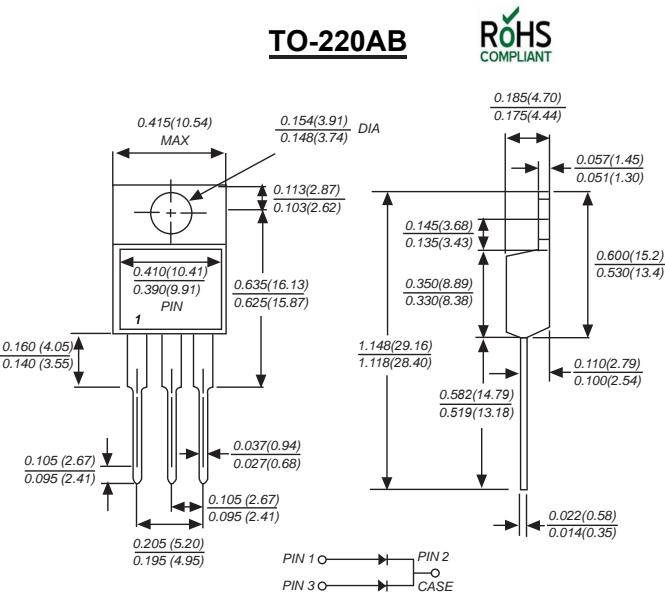

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	MDD SF2010CT	MDD SF2020CT	MDD SF2030CT	MDD SF2040CT	MDD SF2050CT	MDD SF2060CT	UNITS	
Marking Code									
Maximum repetitive peak reverse voltage	V _{RRM}	100	200	300	400	500	600	V	
Maximum RMS voltage	V _{RMS}	70	140	210	280	350	420	V	
Maximum DC blocking voltage	V _{DC}	100	200	300	400	500	600	V	
Maximum average forward rectified current (see fig.1)	I _(AV)	20.0						A	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	90						A	
Maximum instantaneous forward voltage at 10.0A	V _F	1.0	1.3	1.7				V	
Maximum DC reverse current TA=25°C at rated DC blocking voltage TA=100°C	I _R	10			500				uA
Typical junction capacitance (NOTE 1)	C _J	200						pF	
Typical thermal resistance (NOTE 2)	R _{θJC}	3.5						°C/W	
Maximum Reverse Recovery time (NOTE 3)	T _{rr}	35						nS	
storage temperature range	T _{jT_{STC}}	-55 to +150						°C	

Note:1.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2.Thermal resistance from junction to case.

3..Reverse Recovery Test Conditions: I_F=0.5A, I_R=1A, I_{rr}=0.25A.



SF2010CT THRU SF2060CT

Reverse Voltage - 100 to 600 Volts Forward Current - 20.0 Ampere

Ratings And Characteristic Curves

Fig.1 FORWARD CURRENT DERATING CURVE

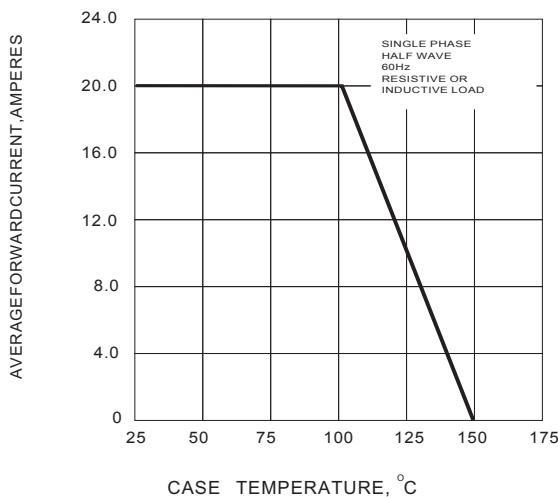


Fig.2 TYPICAL JUNCTION CAPACITANCES

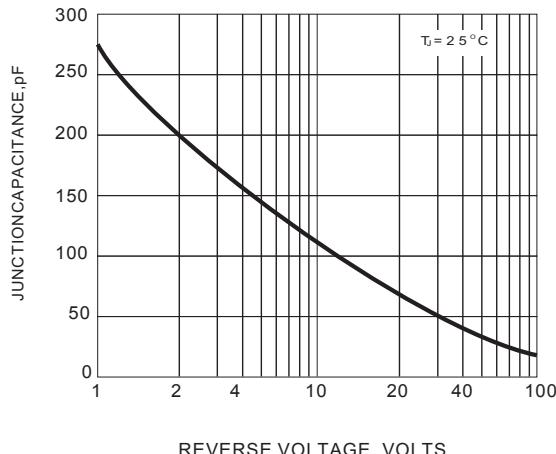


Fig.3 FORWARD CHARACTERISTICS

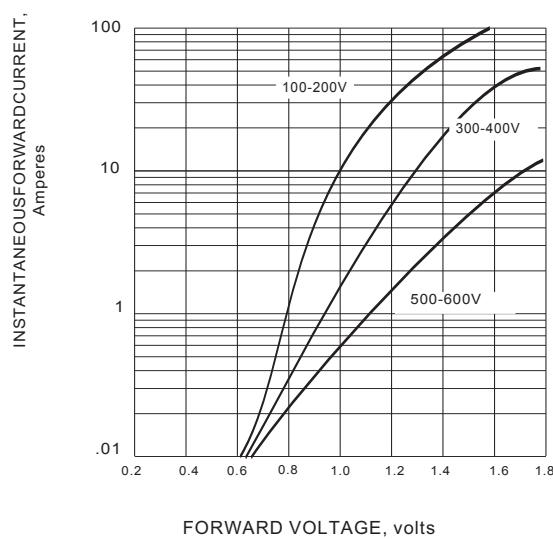


Fig.4 TYPICAL REVERSE CHARACTERISTICS

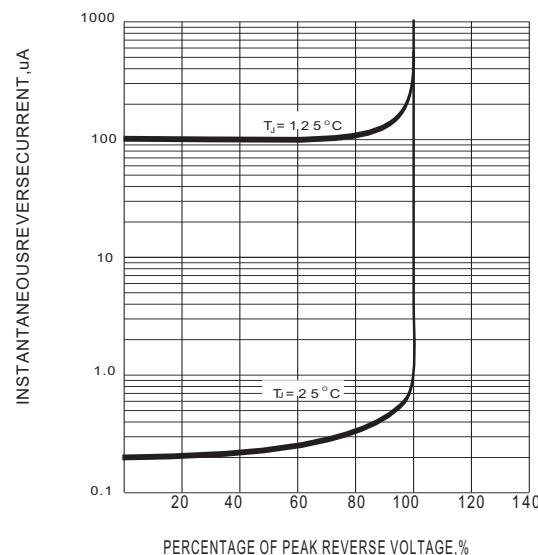


Fig.5 PEAK FORWARD SURGE CURRENT

