




SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Metal silicon junction,majority carrier conduction
- ◆ Low power loss,high efficiency
- ◆ Built-in strain relief,ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:
250 °C/10 seconds at terminals

DO-214AB/SMC ROHS COMPLIANT

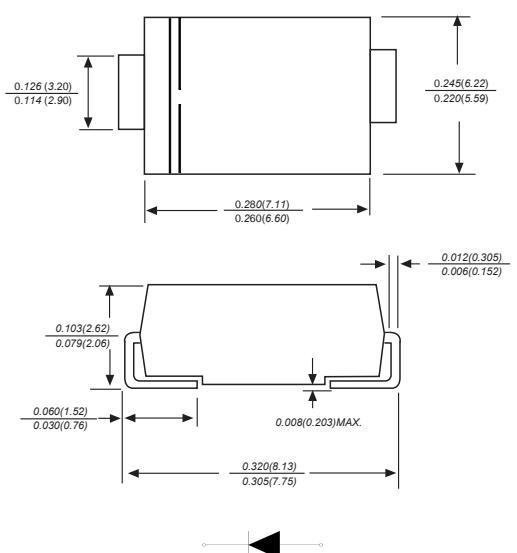

Dimensions in inches and (millimeters)

Mechanical Data

Case : JEDEC DO-214AB/SMC molded plastic body
Terminals : Solderable per MIL-STD-750, Method 2026
Polarity : Color band denotes cathode end
Mounting Position : Any
Weight : 0.0077 ounce, 0.22 grams

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz,resistive or inductive load,for capacitive load current derate by 20%.

Parameter	SYMBOLS	MDD SK82C	MDD SK83C	MDD SK835C	MDD SK84C	MDD SK845C	MDD SK86C	MDD SK88C	MDD SK810C	UNITS
Marking Code										
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	35	40	45	60	80	100	V
Maximum RMS voltage	V _{RMS}	14	21	24.5	28	31.5	42	56	70	V
Maximum DC blocking voltage	V _{DC}	20	30	35	40	45	60	80	100	V
Maximum average forward rectified current	I _(AV)						8.0			A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}						150			A
Maximum instantaneous forward voltage at 8.0A	V _F	0.45		0.55		0.70	0.85			V
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C	I _R				1.0					mA
					50					
Typical junction capacitance (NOTE 1)	C _J		900			600				pF
Typical thermal resistance (NOTE 2)	R _{θJA}				35					°C/W
Operating junction temperature range	T _J				-55 to +150					°C
Storage temperature range	T _{STG}				-55 to +150					°C

Note:1.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2.P.C.B. mounted with 2.0"x2.0"(5.0x5.0cm) copper pad areas



SK82C THRU SK810C

Reverse Voltage - 20 to 100 Volts Forward Current - 8.0 Ampere

Typical Characteristics

Fig.1 Forward Current Derating Curve

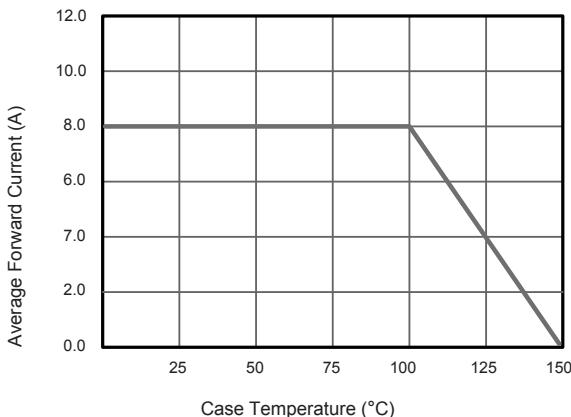


Fig.2 Typical Reverse Characteristics

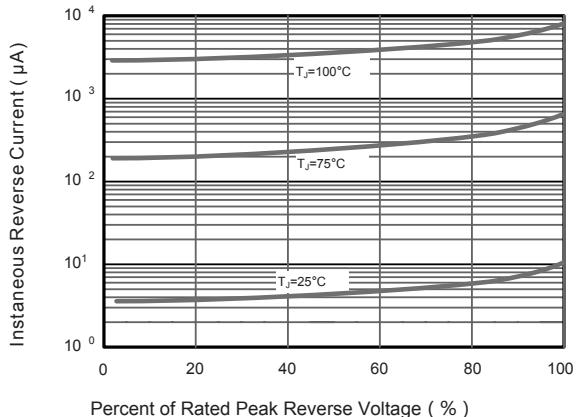


Fig.3 Typical Forward Characteristic

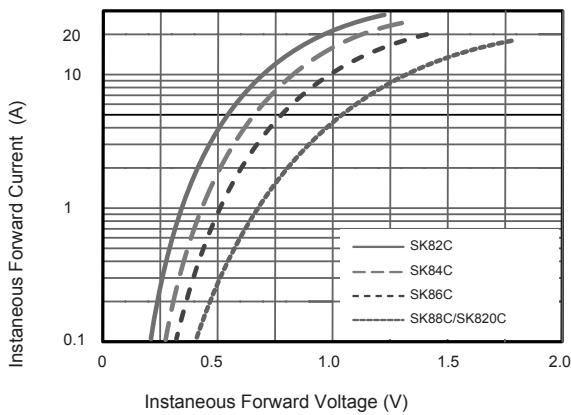


Fig.4 Typical Junction Capacitance



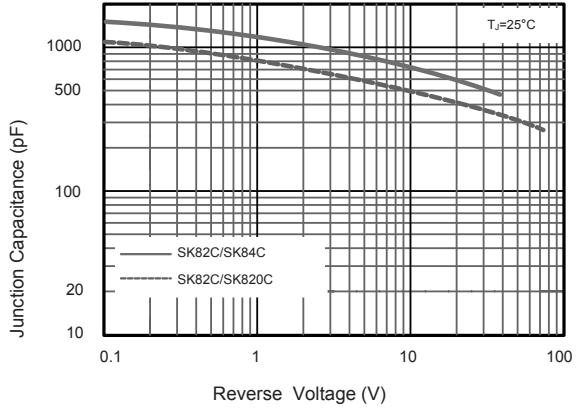


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

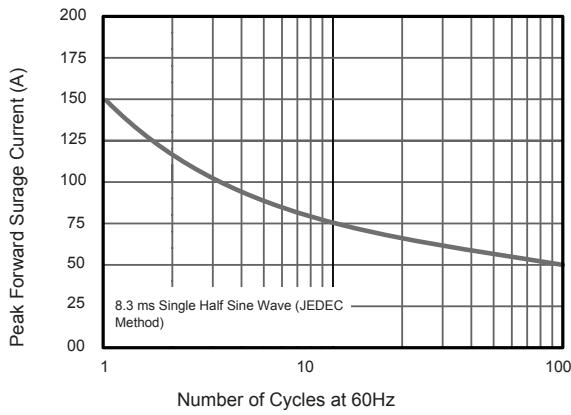

The curve above is for reference only.

Fig.6- Typical Transient Thermal Impedance

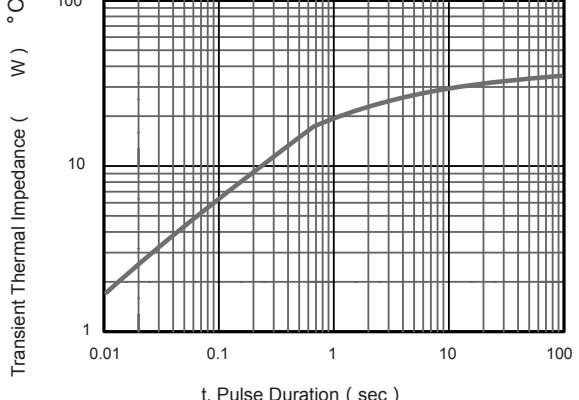




SK82C THRU SK810C

Reverse Voltage - 20 to 100 Volts Forward Current - 8.0 Ampere

Packing information

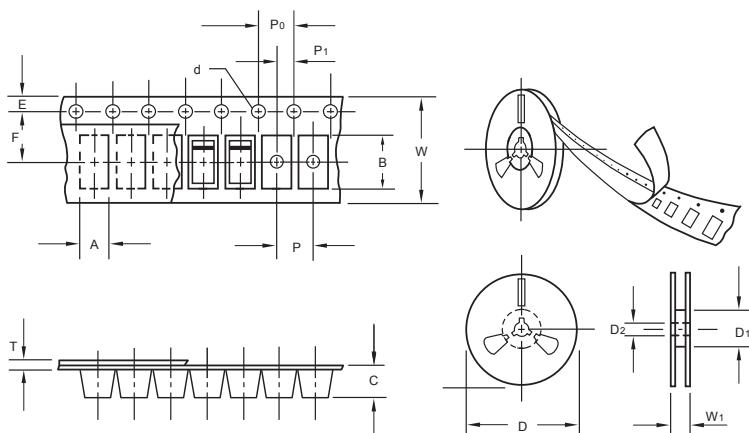


Item	Symbol	Tolerance	SMC
Carrier width	A	0.1	6.15
Carrier length	B	0.1	8.41
Carrier depth	C	0.1	2.42
Sprocket hole	d	0.05	1.50
13" Reel outside diameter	D	2.0	330.00
13" Reel inner diameter	D1	min	50.00
Feed hole diameter	D2	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	7.50
Punch hole pitch	P	0.1	8.00
Sprocket hole pitch	P0	0.1	4.00
Embossment center	P1	0.1	2.00
Overall tape thickness	T	0.1	0.25
Tape width	W	0.3	16.00
Reel width	W1	1.0	16.50

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (mm)	BOX (pcs)	INNER BOX (mm)	REEL DIA. (mm)	CARTON SIZE (mm)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SMC	13"	3,000	4.0	6000	190*190*41	330	365*365*340	42000	14.0

Suggested Pad Layout

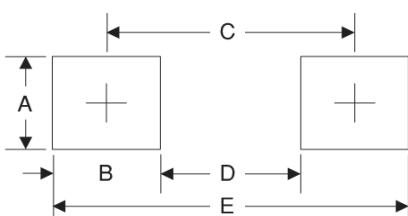

Symbol	Unit (mm)	Unit (inch)
A	4.3	0.170
B	4.1	0.160
C	7.9	0.311
D	3.8	0.150
E	12	0.472